


| | |
|------------------------------------|--|
| Product Family | Arlo |
| Adjustability | Fixed |
| Color | Black |
| Mounting Type | Surface Mounted |
| Body | Extruded aluminum heatsink |
| Light Source | MP LED |
| Color Temperature | 2700-3000-4000-5000-6500K |
| Color Rendering Index | CRI>80 , CRI>90 |
| Power | 13 W |
| Power Factor | Pf>90 |
| Luminaire Efficiency | 50lm/W |
| Light Beam Angle | 100° |
| Lumen | 650 lm |
| Operating Voltage | 220-240V AC / 50-60 Hz |
| Light Source Lifetime | 50.000 hours Led lifetime |
| Optic | High efficiency polycarbonate diffuser |
| Control Type | On/Off- Dali |
| Electrical Insulation Class | Class II |
| Optional Features | Unavailable |
| Sealing | IP20 |
| Weight | 1,2 Kg |
| Dimensions | 1440 x XX Ø60 x 132 - Ø60 x 136 |

DIMENSIONS

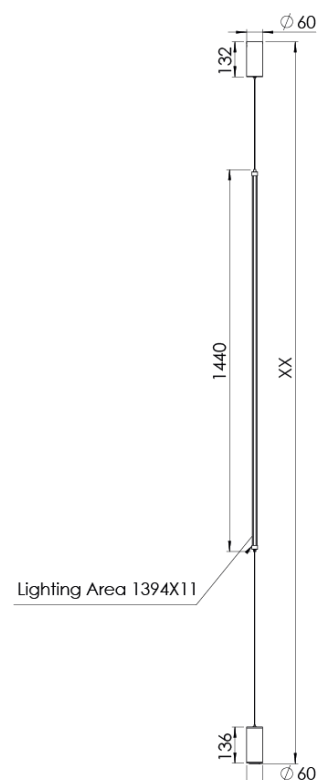

Lumen value is given according to 3000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.