


Product Family	Asimo
Adjustability	Fixed
Color	MAT Eloksal
Mounting Type	
Body	Anodized aluminium extrusion body
Light Source	MP LED
Color Temperature	2700-3000-4000-5000-6500K
Color Rendering Index	CRI>80
Power	14 W/mt
Power Factor	Pf>90
Luminaire Efficiency	78lm/W
Light Beam Angle	120°
Lumen	1092 lm/mt
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency acrylic diffuser
Control Type	On/Off
Electrical Insulation Class	Class II
Optional Features	Unavailable
Sealing	IP20, IP44
Weight	0,1 Kg
Dimensions	8,5 x 13 mm

DIMENSIONS

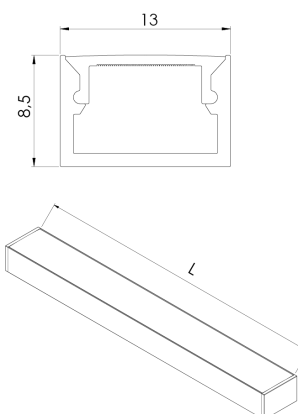

Lumen value is given according to 3000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.