


| | |
|------------------------------------|---|
| Product Family | Duna |
| Adjustability | Fixed |
| Color | White- Black |
| Mounting Type | Surface Mounted |
| Body | Injection polycarbonate body |
| Light Source | MP LED |
| Color Temperature | 2700-3000-4000-5000-6500K |
| Color Rendering Index | CRI>80 , CRI>90 |
| Power | 16,5 W |
| Power Factor | Pf>90 |
| Luminaire Efficiency | 100lm/W |
| Light Beam Angle | 115° |
| Lumen | 1650 lm |
| Operating Voltage | 220-240V AC / 50-60 Hz |
| Light Source Lifetime | 50.000 hours Led lifetime |
| Optic | High efficiency milky polycarbonate diffuser |
| Control Type | On/Off |
| Electrical Insulation Class | Class II |
| Optional Features | Emergency kit system can be integrated, microwave sensor option |
| Sealing | IP65 |
| Weight | 0,95 Kg |
| Dimensions | Ø265 x 83 mm |

DIMENSIONS

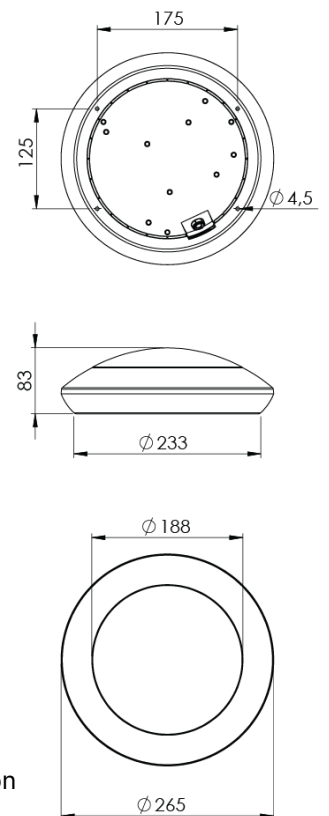

Lumen value is given according to 4000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.