


| | |
|-----------------------|--|
| Product Family | Kendo |
| Adjustability | Adjustable: 350° - 90° + 15° & 15° |
| Color | White- Black- Gray- RAL |
| Mounting Type | Pendant |
| Body | Extruded aluminium body with electrostatic powder coated |

| | |
|------------------------------|------------------------------|
| Light Source | HP LED/ COB LED |
| Color Temperature | 2700-3000-4000-5000-6500K |
| Color Rendering Index | CRI>80,CRI>90 |
| Power | 38 W |
| Power Factor | Pf>90 |
| Luminaire Efficiency | 105.5 lm/W - 96.5 lm/W |
| Light Beam Angle | 120° |
| Lumen | 3674 lm |
| Operating Voltage | 220-240V AC / 50-60 Hz |
| Light Source Lifetime | 50.000 hours Led lifetime |
| Optic | High efficiency acrylic lens |

| | |
|------------------------------------|--|
| Control Type | On/Off- Dali |
| Electrical Insulation Class | Class I |
| Optional Features | Emergency kit system can be integrated |

| | |
|-------------------|----------------|
| Sealing | IP20 |
| Weight | 5 Kg |
| Dimensions | 65x85xL1500 mm |

DIMENSIONS

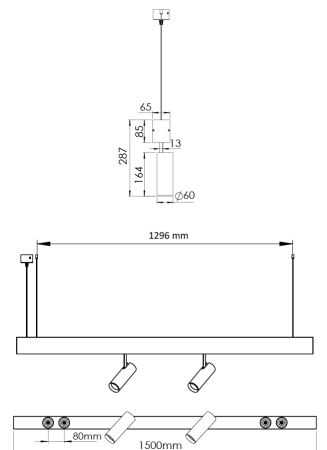

Lumen value is given according to 4000K value.
 Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
 All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.