




Product Family	Mirae
Adjustability	Fixed
Color	White- Black- Gray- RAL
Mounting Type	
Body	Electrostatic powder coated aluminum body, Plastic injection case
Light Source	HP LED
Color Temperature	3000-4000-6500K
Color Rendering Index	CRI>80 , CRI>90
Power	6 W
Power Factor	Pf>90
Luminaire Efficiency	10 lm/W
Light Beam Angle	22°
Lumen	60 lm
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency acrylic lens
Control Type	On/Off
Electrical Insulation Class	Class I
Optional Features	Unavailable
Sealing	IP66
Weight	0,61 Kg
Dimensions	Ø110 x 143 mm

DIMENSIONS

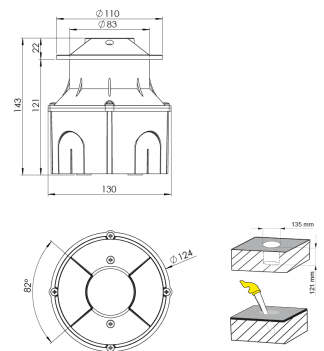

Lumen value is given according to 3000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.