





Product Family	Niva
Adjustability	Adjustable: 30°&30°
Color	White- Black- Gray- RAL
Mounting Type	Adjustable Recessed Mounted
Body	Extruded aluminium body with electrostatic powder coated

Light Source	COB LED
Color Temperature	2700-3000-4000-5000-6500K
Color Rendering Index	CRI>80 , CRI>90
Power	14 W
Power Factor	Pf>90
Luminaire Efficiency	103lm/W
Light Beam Angle	15°,24°,36°,60°
Lumen	1442 lm
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency reflector and PC glass

Control Type	On/Off – Dali
Electrical Insulation Class	Class II
Optional Features	Emergency kit system can be integrated

Sealing	IP20
Weight	0,8 Kg
Dimensions	Ø105x100mm

DIMENSIONS

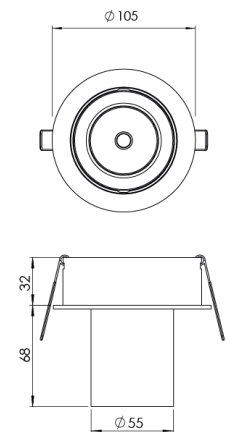

Lumen value is given according to 4000K value.
 Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.
 All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.