




Product Family	Panel
Adjustability	Fixed
Color	White- Black- Gray- RAL
Mounting Type	Recessed Mounted
Body	Sheet steel housing with electrostatic powder coated
Light Source	MP LED
Color Temperature	2700-3000-4000-5000-6500K
Color Rendering Index	CRI>80,CRI>90
Power	35 W
Power Factor	Pf>90
Luminaire Efficiency	98lm/W
Light Beam Angle	120°
Lumen	3430 lm
Operating Voltage	220-240V AC / 50-60 Hz
Light Source Lifetime	50.000 hours Led lifetime
Optic	High efficiency opal diffusers
Control Type	On/Off
Electrical Insulation Class	Class I
Optional Features	Emergency kit system can be integrated
Sealing	IP40, IP44
Weight	3,4 Kg
Dimensions	600 × 600 × 70 mm

DIMENSIONS

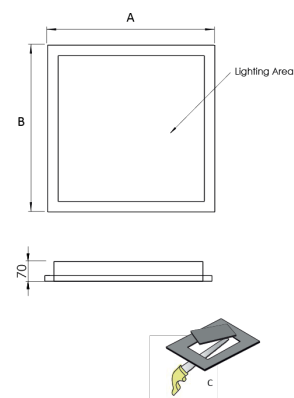

Lumen value is given according to 4000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.