




| | |
|------------------------------------|---|
| Product Family | Riven |
| Adjustability | Adjustable: 5° & 5°-350° |
| Color | White- Black- Gray- RAL |
| Mounting Type | Adjustable Recessed Mounted |
| Body | Electrostatic powder coated aluminum body |
| Light Source | COB LED |
| Color Temperature | 2700-3000-4000-5000-6500K |
| Color Rendering Index | CRI>80 , CRI>90 |
| Power | 8 W |
| Power Factor | Pf>90 |
| Luminaire Efficiency | 97lm/W |
| Light Beam Angle | 15°, 24° ,36° ,60° |
| Lumen | 776 lm |
| Operating Voltage | 220-240V AC / 50-60 Hz |
| Light Source Lifetime | 50.000 hours Led lifetime |
| Optic | High efficiency reflector, Extra clear tempered glass |
| Control Type | On/Off |
| Electrical Insulation Class | Class I |
| Optional Features | Emergency kit system can be integrated |
| Sealing | IP66 |
| Weight | 0,6 Kg |
| Dimensions | Ø110 x 86 mm |

DIMENSIONS

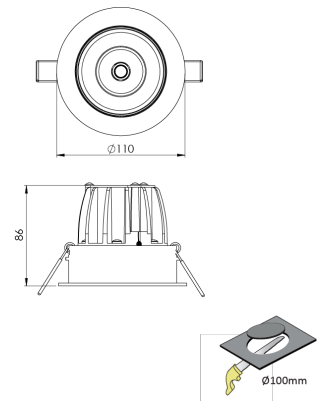

Lumen value is given according to 4000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.