




| | |
|-----------------------|---|
| Product Family | Siva |
| Adjustability | Adjustable: 330° - 90° |
| Color | White- Black- Gray- RAL |
| Mounting Type | Surface Mounted |
| Body | Aluminum extruded body with electrostatic powder coated |

| | |
|------------------------------|---------------------------|
| Light Source | HP LED |
| Color Temperature | 2700-3000-4000-5000-6500K |
| Color Rendering Index | CRI>80 |
| Power | 5 W |
| Power Factor | Pf>90 |
| Luminaire Efficiency | 80lm/W |
| Light Beam Angle | 10°,25°,40°,60° |
| Lumen | 400 lm |
| Operating Voltage | 220-240V AC / 50-60 Hz |
| Light Source Lifetime | 50.000 hours Led lifetime |

| | |
|------------------------------------|-------------|
| Control Type | On/Off |
| Electrical Insulation Class | Class I |
| Optional Features | Unavailable |

| | |
|-------------------|----------------------------|
| Sealing | IP20 |
| Weight | 0,85 Kg |
| Dimensions | Ø29 x 140 mm - 45 x 145 mm |

DIMENSIONS

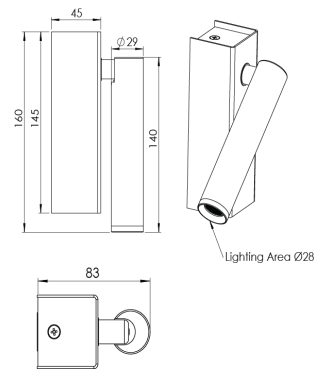

Lumen value is given according to 3000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.