


|                       |  |
|-----------------------|--|
| <b>Product Family</b> | Soren  |
| <b>Adjustability</b>  | Fixed  |
| <b>Color</b>          | White- Black- Gray- RAL                                  |
| <b>Mounting Type</b>  | Recessed Mounted   |
| <b>Body</b>           | Die-cast aluminium body with electrostatic powder coated |

|                              |                                |
|------------------------------|--------------------------------|
| <b>Light Source</b>          | MP LED                         |
| <b>Color Temperature</b>     | 2700-3000-4000-5000-6500K      |
| <b>Color Rendering Index</b> | CRI>80,CRI>90                  |
| <b>Power</b>                 | 20 W                           |
| <b>Power Factor</b>          | Pf>90                          |
| <b>Luminaire Efficiency</b>  | 101lm/W                        |
| <b>Light Beam Angle</b>      | 120°                           |
| <b>Lumen</b>                 | 2020 lm                        |
| <b>Operating Voltage</b>     | 220-240V AC / 50-60 Hz         |
| <b>Light Source Lifetime</b> | 50.000 hours Led lifetime      |
| <b>Optic</b>                 | High efficiency opal diffusers |

|                                    |  |
|------------------------------------|--|
| <b>Control Type</b>                | On/Off – Dali                          |
| <b>Electrical Insulation Class</b> | Class II                               |
| <b>Optional Features</b>           | Emergency kit system can be integrated |

|                   |              |
|-------------------|--------------|
| <b>Sealing</b>    | IP20         |
| <b>Weight</b>     | 0,59 Kg      |
| <b>Dimensions</b> | Ø190 x 30 mm |

## DIMENSIONS

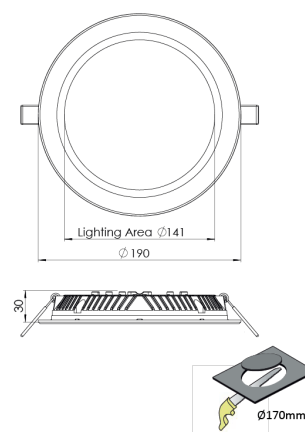

Lumen value is given according to 3000K value.

Luminaire is F-marked and suitable for direct mounting on normally flammable surfaces.

All components are provided with 5 year limited guarantee. A qualified electrician must ensure proper installation of the product.